

JRA-051A,051B

Remote Amplifier

TABLE
AMPLIFIER
& OTHERS

P.A
AMPLIFIER

RACK
CONNECTION

RACK
TYPE

MUSIC
AMPLIFIER

AUDIO
MIXER

SPEAKER
& OTHERS

RACK CABINET
& CONSOL DESK

SYSTEM
CONNECTION




JRA-051A



JRA-051B



Accessory

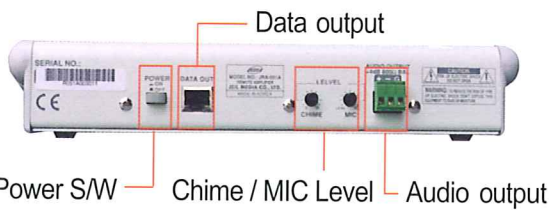

Power SW Chime / MIC Level Data output Audio output


FEATURES

- Individual zone selector + "all call".
- Chime function.
- Unidirectional microphone to reduce feedback.
- Data LED indicator.
- Superior circuit communication by RS485 (Data via UTPcat5, audio via 2core shielded).
- If more than 1 piece is needed in the system ,use JDR-104.

SPECIFICATIONS

TECHNICAL & GENERALMIC	
Input Level	-50dB
Output level/impedance	+4dBu/600ohm bal.
Frequency response	Less than -3dB(200Hz-20kHz)
Signal to noise ratio	More than 68dB
T.H.D	Less than 0.05%
Speaker Controls	RA-051A : 20Lines RA-051B : 10Lines
Power consumption	3W
Power	DC 24V
Dimensions(mm)	275(W) x 51(H) x 156(D)
(inch)	10.8(W) x 2(H) x 6.1(D)
Weight(kg/lbs)	2 / 4.4

SYSTEM CONNECTIONS

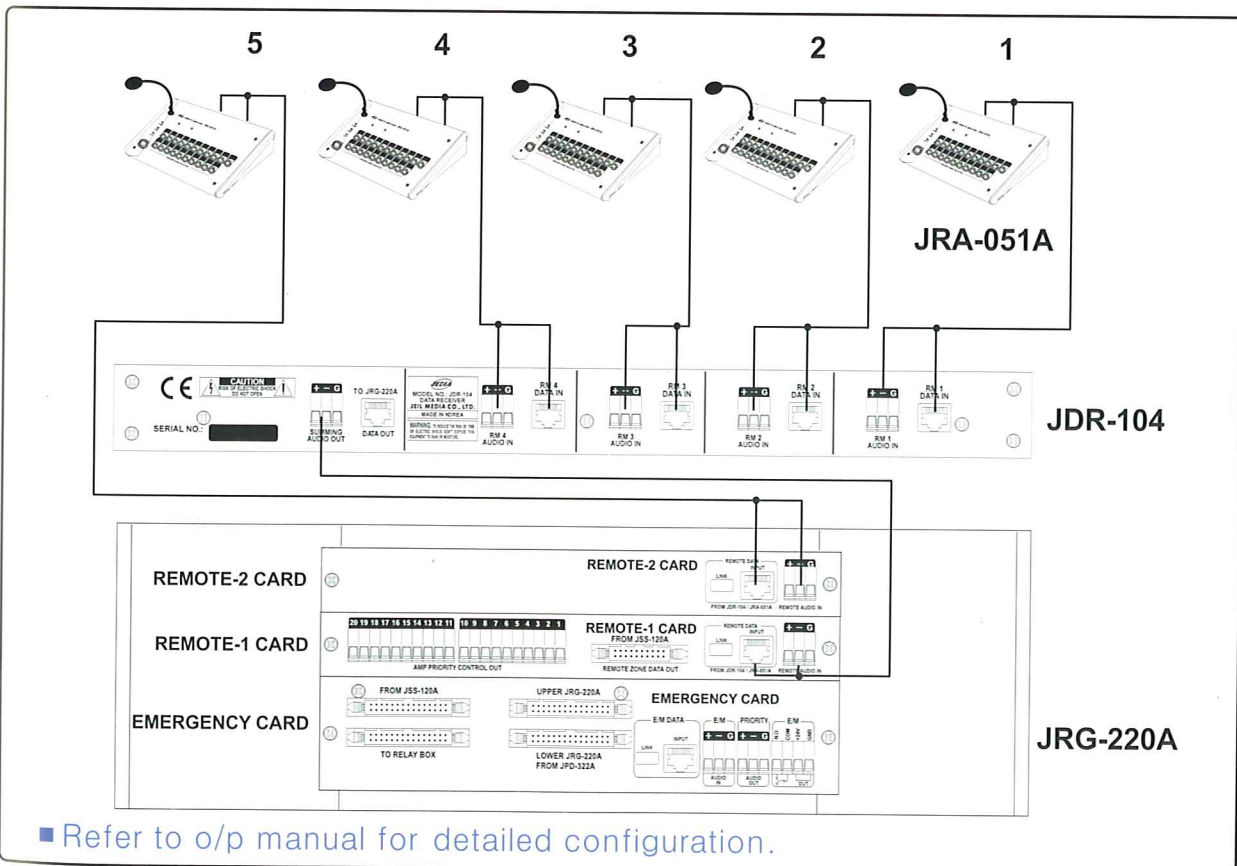

■ Refer to o/p manual for detailed configuration.