


Ordering Information

	Stock Code	Description
	KSP-NDT	Proximity reader with 992 users c/w ABS casing (Format : Magnetic)
	KSP-NDH	Proximity reader with 992 users c/w ABS casing (Format : Wiegand-26 bits)
	KSP-MSN	Contact-less smartcard reader (Mifare Card Serial Number) with 992 users c/w ABS casing
	CR100	External alarm relay board-dry contact (Optional accessories for alarm features)
	Stock Code	Description
	KSP-992	Proximity reader with 992 users and alarm feature c/w metal casing (Format : Magnetic)
	Stock Code	Description
	CAS-SKA	32 PIN code access and alarm feature c/w metal casing

System Configuration

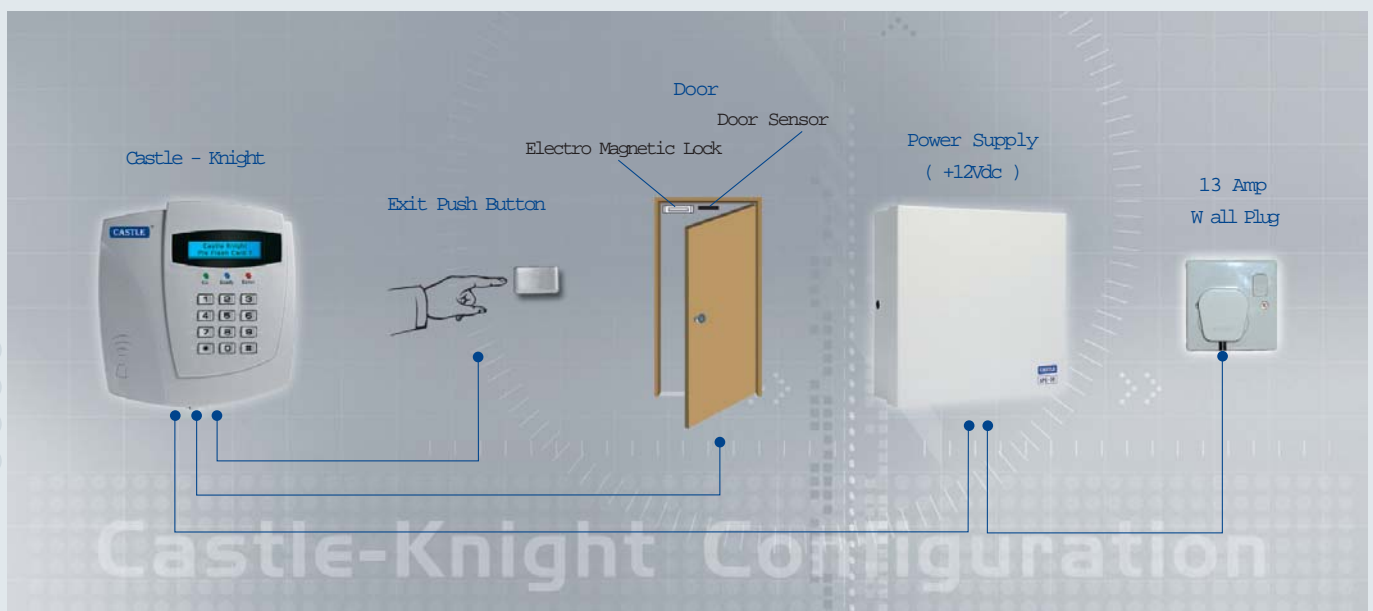

(All the model above required power supply for operation. 230 - 240Vac, 50Hz input - 12Vdc, 3A output)