

PC-1450L

interM

SLIM POWERED MIXER




FEATURES

- **6 MONO 2 STEREO INPUT POWERED MIXER**
This powered mixer are high performance mixing function with a integrated 250W stereo amplifier. Any sound source of microphone, cassette decks and electric guitars can be applied to this channel input.
- **7 BAND GRAPHIC EQUALIZER**
For easy sound tuning with musical instrument, 7 band graphic equalizer is provided.
- **CHANNEL EQUALIZER**
The 3 band equalizer are designed for ± 15 dB control on mono input channel.
The 2 band equalizer are designed for ± 15 dB control on stereo input channel.
- **DSP FUNCTION:8 PROGRAMMED EFFECT**
Built-in, 24-bit DSP with 8 Selectable Presets including Reverb, Delay and Chorus.
- **PFL FUNCTION OF ALL CHS.**
The PFL function allows you to monitor through headphone any input channel before the channel fader.
- **PHANTOM POWER SWITCH/CH (+48V)**
Phantom power is provided for easy connection of condenser microphones requiring an external power supply.
- **PWM DIGITAL AMPLIFIER**
The amplifier provides high efficiency, slim size, high reliability, and light weight.

SPECIFICATIONS

- **ELECTRICAL** *0dB=0.775Vrms
 - Input Sensitivity/Impedance
 - MIC-60dB/4k Ω (BAL)
 - LINE-20dB/10k Ω (BAL)
 - AUX+4dB/10k Ω (UNBAL)
 - TAPE INPUT-10dBV/10k Ω
 - Rated Output
 - Main Out, Mono Out+4dB/600 Ω (UNBAL)
 - AUX Send+4dB/600 Ω (UNBAL)
 - REC Out-10dB/10k Ω (UNBAL)
 - PHONE100mW 40 Ω Load
 - AMP OUT250W X 2 @ 4 Ω (THD 0.5%)
 - T.H.D(20Hz-20kHz)0.5%
 - EIN-127dB
 - Buss Noise-78dB
 - Crosstalk-70dB
- **GENERAL**
 - Power SourceAC 100V-240V, 50/60Hz
 - Power Consumption370W
 - Weight10kg
 - Dimensions470(W)x82(H)x312(D)mm

PC-1450L

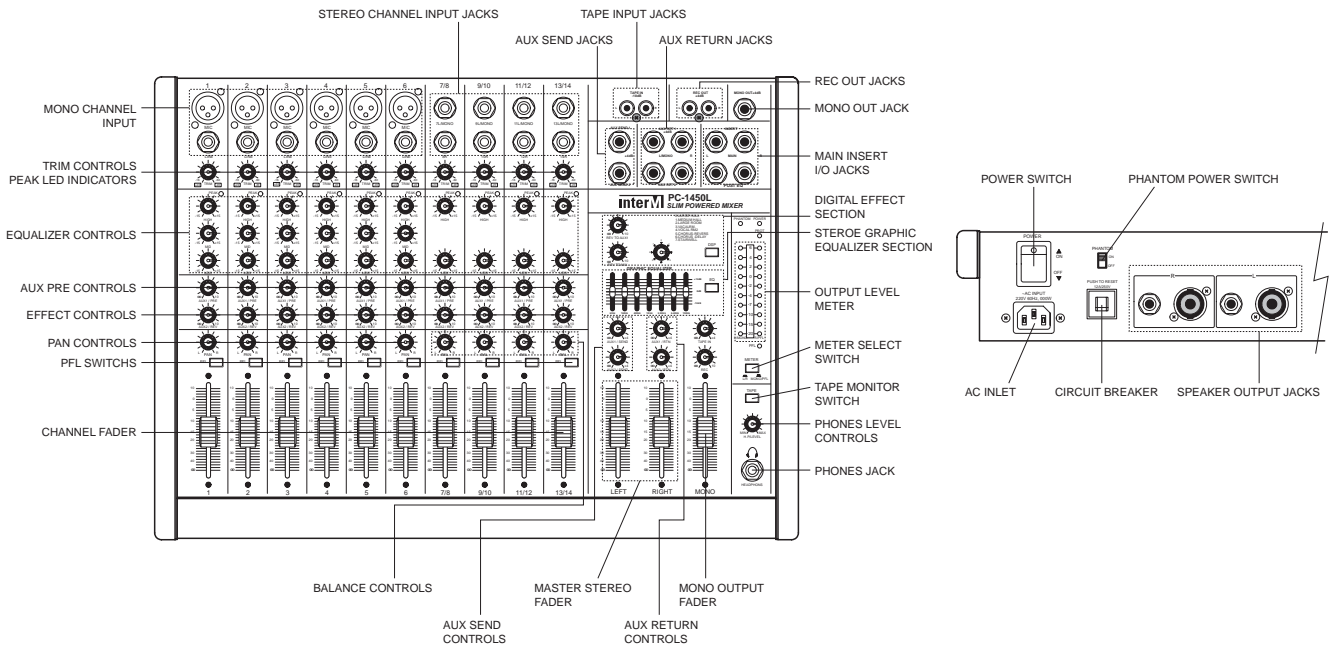

BLOCK DIAGRAM

