


A900 / A1400 / A1800 / A2400 / A2800 / A3200

Professional Power Amplifier

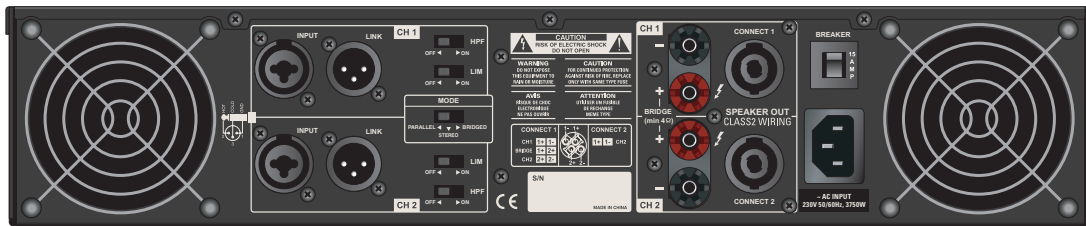

Features

- **Controls**
 - Front : Volume Control by 21 Detent Potentiometer for each Channel
 - Rear : Mode Selector Switch (Parallel/Stereo/Bridged Mono)
- **HPF** : On/Off Switch for each Channel
- **Limiters** : On/Off Switch for each Channel
- **Connectors**
 - Input : Combo Jack Electronically Balanced & XLR Male for Input Link
 - Output : 5 way Binding Post & Speakon for each Channel
- **Indicator** : Signal, -20dB, -10dB, 0dB, Clip, Protect & Active
- **Protection** : Output Current Limiting, Thermal Protection, DC Offset Protection & Circuit Breaker
- **Cooling** : Variable Speed Fan forced Cooling

Specifications

		A900	A1400	A1800	A2400	A2800	A3200
Rate Power (1 kHz, THD 0.5%)	Stereo @ 8 Ω	210 W	300 W	400 W	500 W	600 W	700 W
	Stereo @ 4 Ω	320 W	450 W	600 W	750 W	900 W	1100 W
	Stereo @ 2 Ω	430 W	700 W	900 W	1200W	1400W	1600 W
	Bridge @ 8 Ω	650 W	900 W	1200 W	1400 W	1800 W	2200 W
	Bridge @ 4 Ω	850 W	1400 W	1800 W	2400 W	2800 W	3200 W
Input Sensitivity (4Ω, 1 kHz)	4dBu						
Input Impedance	30 kΩ Balanced / 15 kΩ Unbalanced						
Input CMRR (1 kHz)	> 60dB						
Slew Rate (8Ω)	40 V/msec						
Frequency Response (±0.5dB)	20 Hz ~ 20 kHz						
Class	AB			H			
T.H.D (1 kHz, Rated Power)	< 0.03 %						
Signal to Noise Ratio	> 100 dB						
Damping Factor (8 Ω, 400 Hz)	> 250			> 350			
Channel Separation (8 Ω, 1 kHz)	> 80 dB						
Power Source	AC 100~240 V, 50/60 Hz						
Weight (Net)	11 kg	14.5 kg	16.9 kg	18 kg	19 kg	20 kg	
Dimensions (W x H x D)	482 x 88 x 420 mm						