



JDR-104

FRONT VIEW

Data Receiver

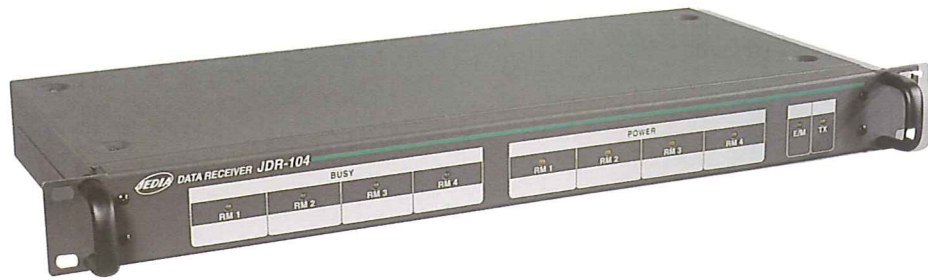

REAR VIEW

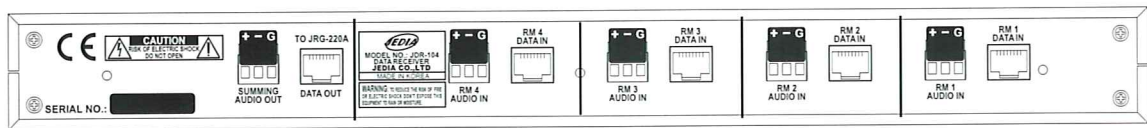

FEATURES

- Up to 4pcs of 20-zone paging microphone's JRA-051A.
- 4 LED indicators "BUSY" to monitor the status.
- 4 power "ON" LED's to check the operation.
- RS485 data communication to JRA-051A (UTPcat 5).
- Superior audio circuit for the long distance with balanced circuit (separate cable).
- Overall priority (E/M) will mute all JRA-051A.

SPECIFICATIONS

TECHNICAL & GENERAL	
Input sensitivity / impedance	Nor +4dBu/600Ω bal
Output level /impedance	Nor +4dBu/600Ω bal
Frequency response	Less than -1dB(20Hz-20kHz)
Signal to noise ratio	More than 86dB
T.H.D(1kHz)	Less than 0.03%
Power consumption	3.6W
Power	DC 24V
Dimensions (mm)	483(W) x 44(H) x 200(D)
(inch)	19(W) x 1.7(H) x 7.9(D)
Weight(kg/lbs)	3.0 / 6.6

Drawing

