


SATELLITE

The Theatrelight Satellite is an easy to use dimmer pack designed to withstand the rigours of touring. The Satellite may be controlled remotely by DMX-512 or RS-485 9600 baud signal. Applications include theatres, events, tours, television studios, film production, discos, schools and conferences.

FEATURES

- Easy setting of DMX start address
- DMX-512, or RS-485 9600 baud control
- Switch mode on all dimmers
- 1, 2 or 3 phase operation
- Mains frequency independent: 45-70 Hz
- Individual circuit test switches
- Instant or soft-start dimmer response
- Warm and max level set on all dimmers
- SCR devices permit inductive loads
- Thermal-magnetic M.C.B. Protection
- Amorphous iron toroidal filter chokes
- Rack mounting brackets included

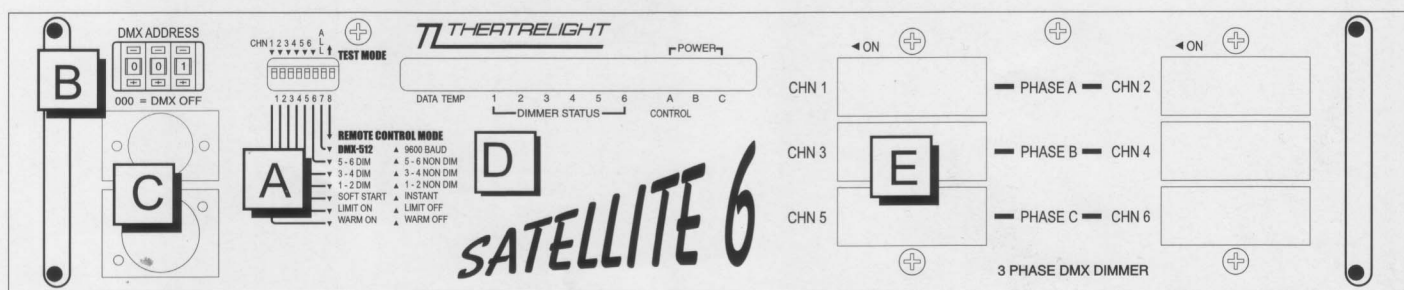

A: Dip switch settings

- Switch 1: Warm level on / off
- Switch 2: Maximum level Limit on / off
- Switch 3: Softstart / Instant
- Switches 4-6 Channel dim / non dim
- Switch 7: DMX-512 / 9600 Baud
- Switch 8: Remote control / Test mode

B: Thumbwheel selectable DMX Address

- C: XLR 5 pin Connectors for DMX-512
- D: Power, data, temperature, and dimmer channel status LEDs

E: Thermal magnetic MCBs for mains protection

Satellite 3 is similar but fitted with 3 MCBs.

Satellite Dimmer Specifications

Input Power: 240 Volts AC, 1, 2 or 3 phase with neutral, 45 to 75 Hertz (110 Volts optional)

Output Terminations: Moving cage terminals, sockets or internal busbar depending on model

Output Protection: Miniature thermal magnetic circuit breakers

Control inputs: DMX-512 or RS-485 9600 baud signal

Construction: Durable epoxy powder coated zintec steel

Dimensions: 19" rack mount, 2U high (88mm), 435mm wide, 280mm deep, 6kg

Available in two models:

TLSAT 610 : 6 channel, 10 amps max per channel

TLSAT 330 : 3 channel, 30 amps max per channel

THEATRELIGHT

Theatrelight Ltd, 6 Rowe St, Onehunga, Auckland, New Zealand
Tel: 64-9-622 1187, Fax: 64-9-636 5803, Toll free fax: 0800 999 876
Internet: www.theatrelight.co.nz, e-mail: sales@theatrelight.co.nz

Starlet Control Panel

The Theatrelight Starlets are designed for any venue requiring a simple control panel. They are ideal for drama rooms, shops, hotels and venues requiring a budget lighting control panel. Control output is USITT (1990) DMX-512 industry standard protocol.

The Starlet has a single preset of faders with a park preset, flash keys & dipless crossfader for ease of use.

Available in two models

TLST6: 6 channel single preset console
60mm high, 245mm wide, 175mm deep, 1.8kg

TLST12: 12 channel single preset console
60mm high, 325mm wide, 175mm deep, 2.2kg

Your Local Distributor:

