


# ZS-5306 6 CHANNEL SPEAKER ZONE SELECTOR

## Front & Rear Views

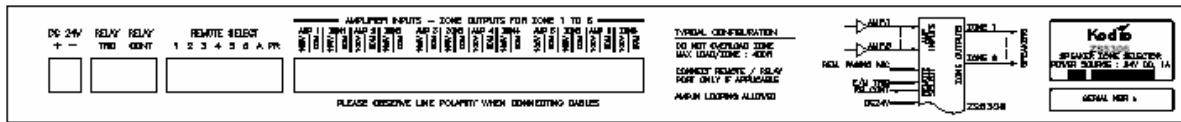

Available in 6 zone version, used for selecting speaker zone directly via the front panel or from remote paging console such as KODIO RM 5006.

### Features

- ❑ Available in 6 zones with ALL CALL.
- ❑ Expandable or cascadable to multiple zones.
- ❑ Remote zone triggering port via external paging mic.
- ❑ Paging override by KODIO paging console with priority override indicator.
- ❑ Emergency paging mic triggering port with dry contact for volume controller overriding application.
- ❑ Flexible amplifier – zone configurations.

### Technical Specifications

Operating Voltage	24V DC via adaptor (optional)
Power Consumption (AT ALL CALL)	3.5 W ; 0.28A
Zone load rating	400 W at 100V amplifier line output
No of zones	6
No of amplifier inputs	6
Zone Selection	Front panel & remote activation
Zone active indication	Front panel LEDs
Switching Mode	Individual or ALL CALL
Cable connection	Up to 2.5mm sq
Cable size	Up to 2.5 mm sq
Dimension (w) x (h) x (d)	482 x 44 x 130
Weight	1.8 kg
Colour	Black ; powder epoxy coated