

CA-5115/5130



MONO POWERED MIXER




FEATURES

- **5 INPUT MONO POWERED MIXER**
This powered mixer are high performance mixing function with a integrated 150W(CA-5115), 300W(CA-5130) mono amplifier.
Any sound source of microphone, cassette decks and electric guitars can be applied to this channel input.
- **EACH INPUT CHANNEL WITH TONE CONTROL**
2 element equalizers are provided to adjust the acoustic characteristics according to microphone, speakers and room structure.
- **5 BAND GRAPHIC EQUALIZER**
It can shape the response of the sound system to suit almost any location.
- **+ 48V PHANTOM POWER**
Enable the built-in, 48Vdc phantom power system for use with a balanced condenser microphones requiring on external power source.
- **TAPE IN, AUX INPUT**
There are used for play back of tape deck, and other electronic instruments, such as an electronic keyboard.
- **EFX SEND, RETURN**
Effect send and return can be used for external effect device.
- **REVERB**
A built-in spring reverb unit allows you to add reverberation effects to your vocal or instruments without having to use an expensive external signal processor.

SPECIFICATIONS

- **ELECTRICAL** *0dB=0.775Vrms
 - Rated Output/Impedance
.....CA-5115:100W/8Ω, 150W/4Ω
.....CA-5130:200W/8Ω, 300W/4Ω
 - Input Sensitivity/Impedance
Low Z Mic-50dB/1kΩ
Hi Z Mic-20dB/47kΩ
AUX-10dB/47kΩ
Tape In-10dB/47kΩ
Amp In+4dB/47kΩ
Effect Return.....+4dB/47kΩ
 - Frequency Response(+1/-3dB)20Hz-30kHz
 - T.H.DAmp Section: <0.3% 20Hz ~ 20kHz
.....Mixer Section: <0.1% 20Hz ~ 20kHz
 - EIN.....-120dB
 - Buss Noise-80dB
 - Crosstalk.....-80dB
- **GENERAL**
 - Power SourceAC 110V-240V, 50/60Hz
 - Power ConsumptionCA-5115:265W
.....CA-5130:550W
 - Weight.....CA-5115:13kg
.....CA-5130:15.3kg
 - Dimensions522(W) × 205(H) × 307(D)mm

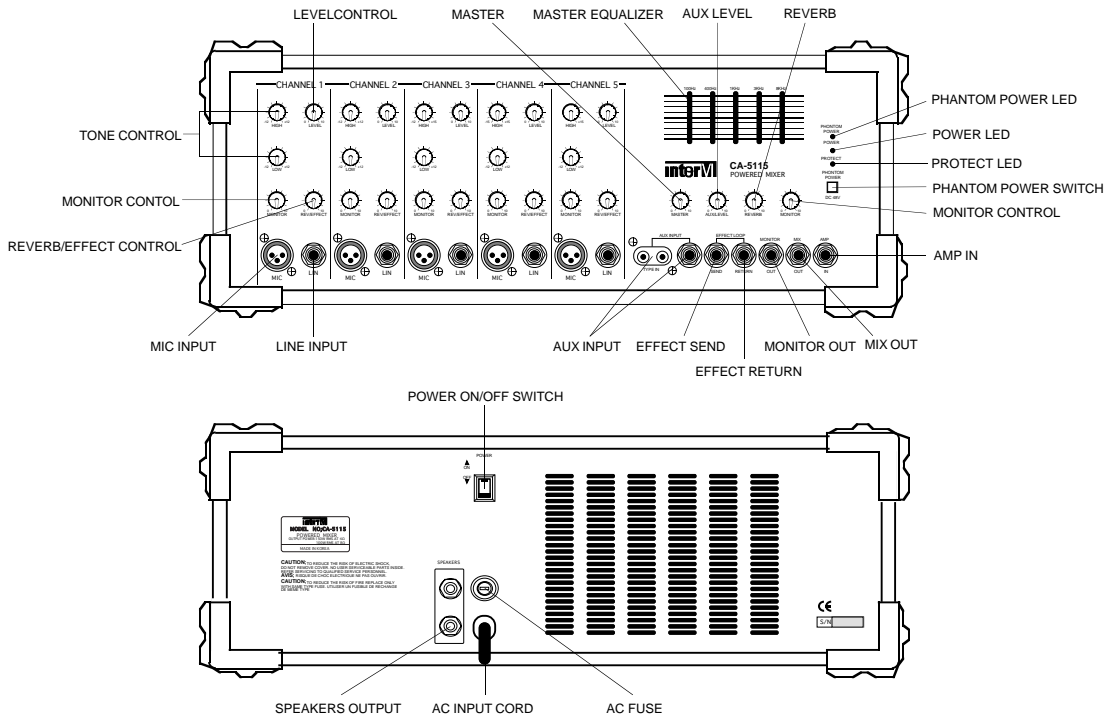

BLOCK DIAGRAM

