


# EUROLIGHT

# LD6230

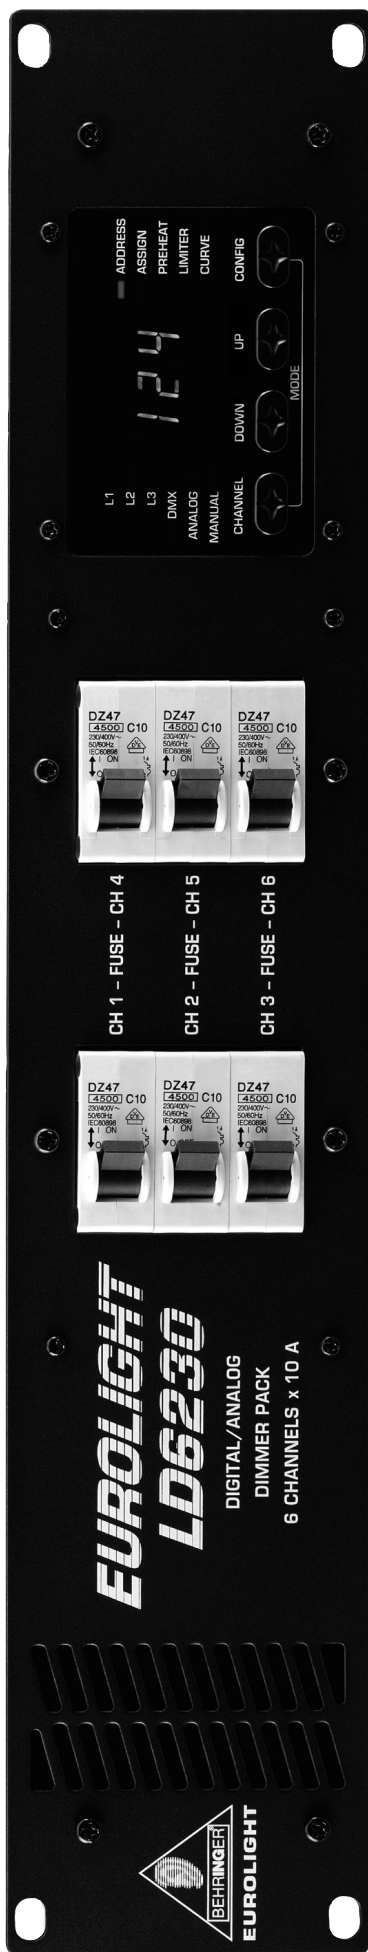

## Specifications

Version 1.0 August 2003

ENGLISH


[www.behringer.com](http://www.behringer.com)



## EUROLIGHT LD6230

# EUROLIGHT

Professional 6-channel DMX/analog controlled dimmer pack

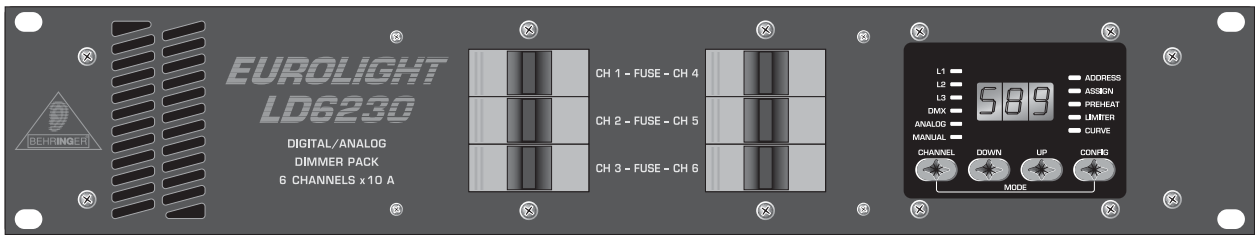

- ▲ 6-channel DMX/analog controlled dimmer pack with up to 10 A output per channel
- ▲ 3-phase mains supply (1 phase possible at lower output power)
- ▲ DMX512 standard interface for digital control
- ▲ Additional 8-pole DIN connector for analog control (0 - 10 V)
- ▲ Adjustable preheat and limiter function to prolong bulb life
- ▲ Precise curve function enables selection of different fade modes
- ▲ Switch option for simple on/off control of each channel
- ▲ Automatic digital input check to detect DMX signal errors
- ▲ Manual mode for dimming capability without an external lighting console
- ▲ Auto store function saves all settings after leaving configuration mode
- ▲ 3-digit display and dedicated control LEDs for better indication in dark environment
- ▲ HARTING® and CEE connection options (connectors not included)
- ▲ Ultra-rugged construction ensures long life, even under the most demanding conditions
- ▲ Designed in Germany. Manufactured under ISO9000 certified management system

## SPECIFICATIONS

### Channels

Number	6
Load per channel	0.2 A min./10 A max.
Maximal load per channel	10 A using a 3-phase connector
Frequency	50/60 Hz

### Inputs

Power supply	3-phase connector, internal terminal block/PG cable screw joint, CEE connector (optional installation by qualified professional)
Analog	0 to +10 V via 8 pin DIN
Digital	DMX512 via XLR 5 pin

### Outputs

Digital	DMX512 via XLR 5 pin
Load	Internal terminal block/PG cable screw joint, HARTING® (optional installation by qualified professional)

### System fuses

Load securing per channel	10 A cable protection switch (type C)
Control section fuse	2 x T 100 mA H/250 V (EU) 1 x T 160 mA H/250 V (EU) 2 x T 160 mA H/250 V (UL) 1 x T 315 mA H/250 V (UL)

### Power supply

Voltage	USA/Canada 120 V~, 60 Hz Europe/U.K./Australia 240 V~, 50 Hz
Maximum power consumption	3 x 20 A

### Dimensions/Weight

Dimensions (H x W x D)	approx. 3 1/3" (84.3 mm) x 19" (482.6 mm) x 15 9/10" (403.8 mm)
Weight	approx. 20.3 lbs. (9.2 kg)

BEHRINGER continuously strives to assure the highest quality standards possible. Required modifications may be implemented without prior notice. Technical data and the appearance of the unit may deviate from the above values and/or illustrations.

---

The information contained in this manual is subject to change without notice. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER is a registered trademark. HARTING® is a registered trademark of the respective owner, which is in no way associated or affiliated with BEHRINGER. ALL RIGHTS RESERVED. © 2003 BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany  
Tel. +49 2154 9206 0, Fax +49 2154 9206 4903

---