

# PO-9106



## PROGRAM DISTRIBUTOR




### FEATURES

- PROGRAM DISTRIBUTION  
The signal distributes from 1 channel input program to 6 channel output program for the convenient use of signal transmission.
- INDECENT LEVEL ADJUSTMENT  
Input and 6 channel output level is able to adjust independently, and each status of level is able to monitor with peak or signal LEDs on each channels.
- TRANSFORMER BALANCED CIRCUIT(OPTION)  
All input and output are designed with electronic balanced circuit and XLR connection, and line matching transformer is mountable optionally.

### SPECIFICATIONS

- ELECTRICAL
  - Input Sensitivity/Impedance.....100mV/600Ω ,BAL
  - Input Level Adjustment .....-20dB
  - Output Level/Impedance .....+4dB/600Ω, BAL
  - Frequency Response.....20Hz~20kHz
  - T.H.D(at 1kHz Rated Output) .....Less than 0.1%
  - S/N.....Better then 75dB
  - Channels.....1 Input, 6 Output
- GENERAL
  - Power Source .....AC 110V~240V, 50/60Hz, DC 24V
  - Weight.....4kg
  - Dimensions.....482(W) ×44(H) ×280(D)mm

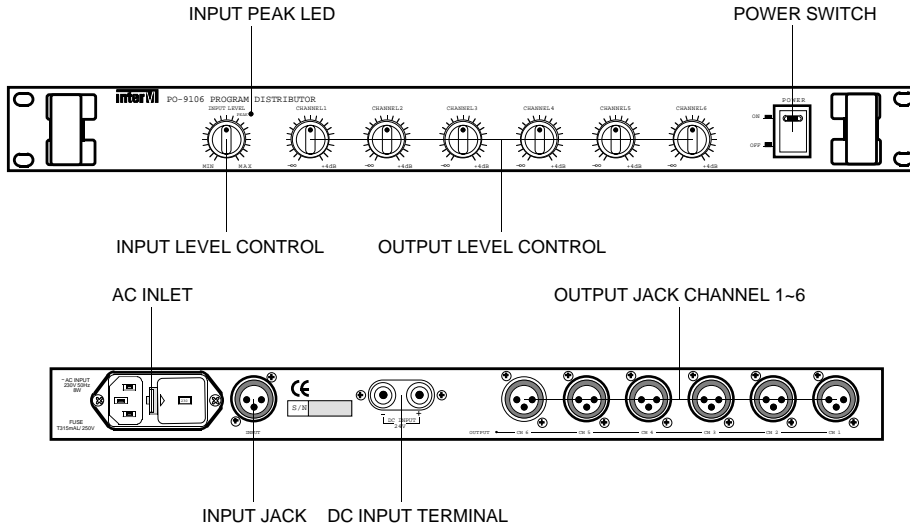

BLOCK DIAGRAM

