

PRE AMPLIFIER




FEATURES

- **9 MONO INPUTS, 3 STEREO INPUTS**
2 Aux inputs, 2 Priority inputs, 2 Sub Outputs, and main output.
- **TONE CONTROL & 4 Band EQ**
Tone control, Hi, Mid, Low, on each channels and 4 band equalizer in main volume for better sound.
- **+18 PHANTOM POWER**
Phantom power is provided for easy connection of condenser microphone requiring an external power supply.
- **MULTIPLE VOLTAGE**
It can be used in AC or DC +24V.
- **2 PRIORITY INPUTS**
CH 1 & 2, two priority inputs automatically activate.
- **INSERT & BALANCE OUTPUT**
Balanced in main output for noise reduction.

SPECIFICATIONS

- **ELECTRICAL** *0dB=0.775Vrms
 - Rated Output/Impedance
Master Out/Sub Out+4dBm/600Ω, BAL
 - REC Out-10dBV/10kΩ, UNBAL
 - Insert0dB/10kΩ
 - Input Sensitivity/Impedance
MIC(1~9 CH)-60dB/600Ω, BAL
 - Line(1~9 CH)-30dB/10kΩ, BAL
 - Priority In0dB/10kΩ, UNBAL
 - Aux In-10dB/20kΩ, UNBAL
 - Frequency Response(+1/-3dB)20Hz~20kHz
 - T.H.D0.5%
 - Residual Noise-70dB
(CHANNEL VR MIN, MASTER MAX)
 - Crosstalk70dB
- **GENERAL**
 - Power SourceAC 110V-240V, 50/60Hz, DC 24V
 - Power Consumption10W
 - Weight5kg
 - Dimensions482(W) × 88(H) × 280(D)mm

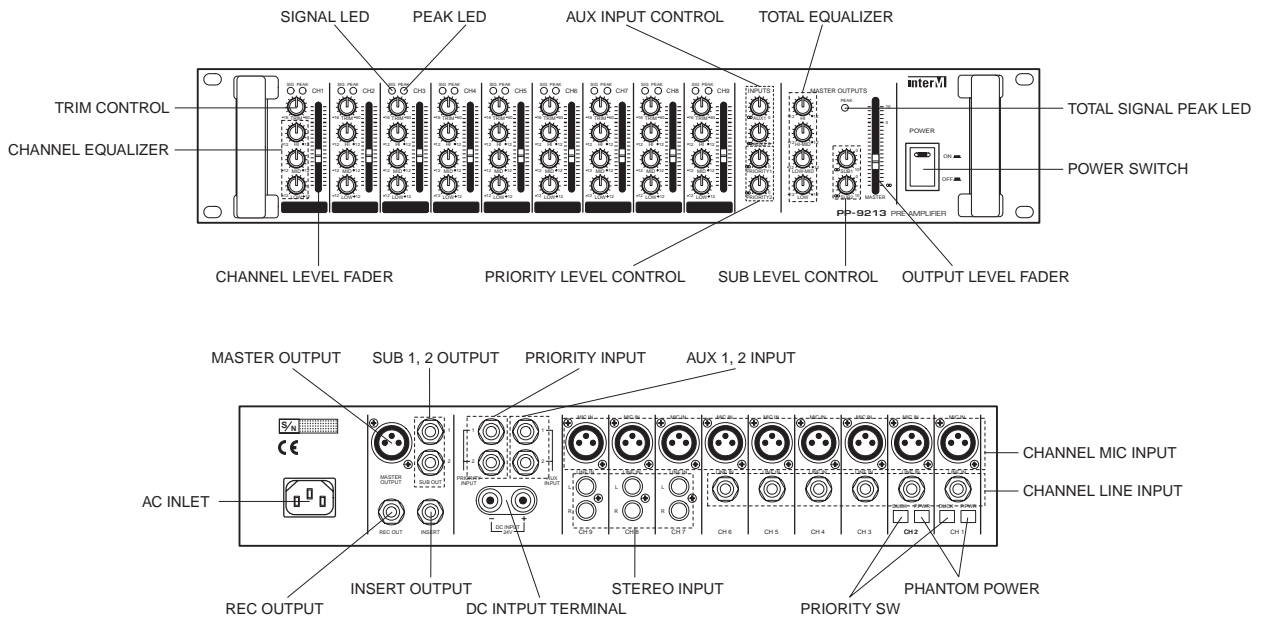

BLOCK DIAGRAM

