



CNB-V1810NVF/V1810PVF

100mm Vandal-Resistant Dome Camera



Features

- 1/3 inch Sony Super HAD CCD
- High Resolution : 550 TV Lines
- Built-in DC Iris Vari-focal Lens(f=3.8~9.5mm)
- **True Day&Night (ICR), 2x Digital Zoom (On/Off)**
- Electronic Sensitivity-up (DSS On/Off)
- **SDNR (Super Digital Noise Reduction)**
- Auto White Balance
- AGC, BLC, Flickerless (On/Off)
- Min : Day (0.3 Lux), Night(0.001Lux, ICR&DSS)
- Extra Video Out Port for Installer
- 3-Axis Camera Construction
- Vandal-proof Dome Housing
- Dome Size : 100mm
- Heater Optional




ACCESSORY

- CNB-WVB100 : Wall Mount Bracket for Vandal Proof Dome Camera



DIMENSIONS

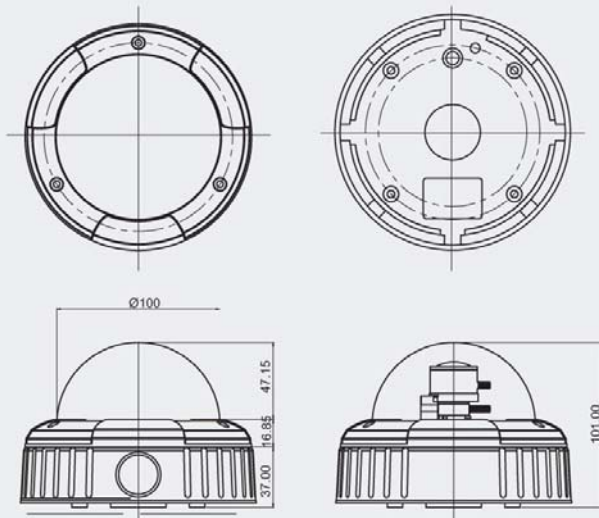

SPECIFICATIONS

Model	CNB-V1810NVF	CNB-V1810PVF
Signal System	NTSC	PAL
Scanning System	2:1 Interface	
Sync. System	Internal	
Image Sensor	1/3 Inch SONY Super HAD CCD	
Total / Effective Pixels	410K/380K	470k/440K
Horizontal Resolution	550 TV Lines	
Video Output	Composite: 1.0V p-p, 75Ω, Unbalanced	
S/N Ratio	More than 50dB (AGC Off)	
Lens	DC Iris Vari-focal Lens (f=3.8~9.5mm)	
Digital Zoom Ratio	2x (On/Off, DIP Switch)	
Min.Illumination	Day(0.3 Lux), Night(0.001, ICR&DSS)	
Day&Night (ICR)	On/Off (Dip switch)	
SDNR	Built-in	
DSS	Built-in (On/Off)	
White Balance	On/Off (Dip switch)	
AGC/BLC/Flickerless	Auto	
Shutter Speed	1/60~1/120,000 sec	1/50~1/120,000sec.
Supplied Voltage	DC 9V~ 15V (Recommendation DC12±0.5V)	
Power consumption	Max. 1.8W / 150mA	
Heater (Option)	Operation Temperature : Under 10°C	
Dimensions(ØxH)	100.0 x 101.0 mm	
Weight	Approx. 844g	