

MSD-100 (NTSC) / MSD-101 (PAL)



10x Mini Speed dome camera



Features


- 100x Zoom (Optical 10x, Digital 10x)
- True Day & Night (ICR)
- DNR (Digital Noise Reduction)
- 128 Preset Positions
- 4 Pattern, 8 Group
- 4 Privacy zone
- Panning speed : MAX. 360° / sec
- DC12V

Specification

ITEM	MSD-100	MSD-101
Signal System	NTSC	PAL
Image Sensor	1/4" SONY CCD	
Total/Effective Pixels	410K/380K	470K/440K
Resolution	500 TV Lines (Color), 570 TV Lines (B/W)	
Shutter Speed	128x ~ 1/120,000 sec.	
S/N Ratio	50dB (AGC Off)	
Zoom	x10 Optical Zoom, x10 Digital Zoom	
Min. Illumination	0.7 Lux (Color) / 0.02 Lux (B/W) @50 IRE	
Day & Night	Auto/ Day / Night (ICR)	
Focus	Auto / Manual / Semi-Auto	
Iris	Auto / Manual	
Focal Length	F1.8, f=3.8-38mm	
AGC	Normal / High / Off	
BLC, SSNR	Low / Middle / High / Off	
White Balance	Auto / Manual (Red, Blue Gain Adjustable)	
Flickerless	Selectable	
Privacy Zone	4 zones	
Range	Pan 360° (Endless) / Tilt 95	
Pan/Tilt Speed	Preset : 360° / sec	
	Manual : 0.05 ~ 360° / sec	
	Swing : 1 ~ 180° / sec	
Preset	128 Preset positions	
Pattern	4 Patterns, about 5 minute / Pattern	
Swing / Group	8 Swings / 8 Groups	
Communication	RS-485	
Protocol	Pelco-D, Pelco-P selectable (RS-485)	
Alarm Input	4 Inputs	
Dimension	Dome : $\phi 115$. Housing: $\phi 147.5 \times 141$ (H) mm	
Weight	Approx 1.2 Kg / 2.6 Lbs	
Operating Temp.	0 ~ 40°C	

Specification are subject to change without any prior notice.

Dimensions (UNIT : mm)

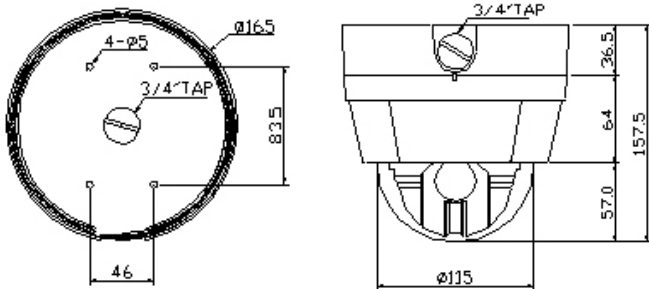

Brackets



[MSD-WMB]



[MSD-CMB]



[MSD-SMB]



[MSD-CMA]



[Flush Mount]