


SC-300DN (NTSC) / SC-301DN (PAL)



Color Box Camera



Dimensions (UNIT : mm)

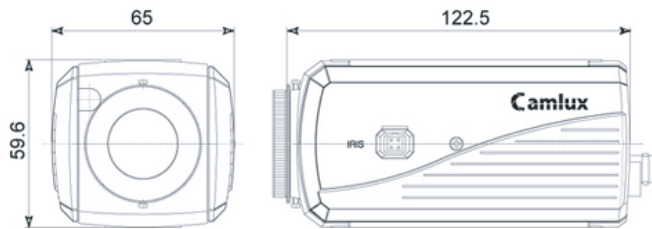

Rear View

Features

- 1/3" SONY Duple Scan CCD
- DSP (Digital Signal Processing)
- 3x Digital Zoom, AGC, BLC, Flickerless On/Off
- DSS (Digital Slow Shutter 0.001 Lux)
- True Day/Night (IR Cut Filter Removable)
- Wide Dynamic Range (WDR)
- Min. Illumination : 0.0003Lux (DSS On, B/W)
- DC / Video / ESC
- Privacy Zone, OSD (On Screen Display)
- C/CS Mount
- Remote Control (RS-485 Interface)

Specification

ITEM	SC-300DN	SC-301DN
Signal System	NTSC	PAL
Image Sensor	1/3" SONY Double Scan CCD	
Total/Effective Pixels	410K/380K	470K/440K
Resolution	480 TV lines	
Shutter Speed	1/60~1/100,000 sec.	1/50~1/100,000 sec.
Sync. System	Internal	
Scanning System	2:1 Interlace	
Scanning Frequency	15.734KHz(H)	51.625KHz(H)
S/N Ratio	More than 48dB (AGC Off)	
Min. Illumination	Day (0.3 Lux), Night (0.1 Lux), DSS (0.001 Lux)	
Day&Night (ICR)	Auto/Day/Night	
AGC/BLC/Flickerless	On / Off	
Digital Zoom	3x	
Video Output	VBS 1.0Vp-p(75Ω Composite)	
WDR	On / Off	
Iris Mode	Video / DC	
Digital Slow Shutter	Off / 2FLD-20FLD / 40FLD / 80FLD / 160FLD Mode	
White Balance	Auto / Hold / Manual	
Camera ID/Zone Label	On / Off	
Mirror/Freeze/Negative	On / Off	
Power Requirements	DC 12V	
Power Consumption	Max. 4.0W / 330mA	
Operating Temp.	-10 °C ~ +50 °C	
Ambient Humidity	90% RH Max	
Dimension	63.6mm(W) x 55.6mm(H) x 118.6mm(L)	

Available Models

- SC-100DN / SC-101DN : 380 TV Lines

Specification are subject to change without any prior notice.