


Magnetic Contacts


7940 Universal Surface Mount

- Super wide gap of 51mm (2"), recessed 25mm (1")
- Screw, adhesive mounted or recessed mount
- Unique quick wire connections - Just insert wires and tighten - No stripping or soldering
- Recessed adaptors included
- Switch: 43 x 9.5 x 9.5mm
- Magnet: 43 x 9.5 x 9.5mm
- Also Available:
7940WH - white
7940BR - brown

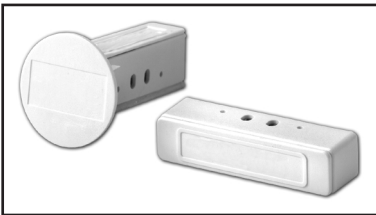


7939 Magnetic Surface Contact

- Standard gap: 25mm (1")
- Ideal for residential or commercial use
- Spacers, covers and screws included
- Enclosed magnet case speeds installation on steel surface
- Cover conceals end of line resistor (EOL)
- Switch: 64 x 13 x 14mm
- Magnet: 64 x 13 x 14mm
- Also Available:
7939WH - white
7939BR - brown
7939GY - grey

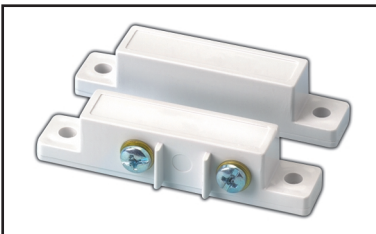


940 Surface Mount Magnetic Contact

- Standard gap: 19mm (3/4")
- Miniature size perfect for homes and offices
- Attractive cover keeps mounting screws and terminals screws hidden
- Concealed or surface wiring
- Complete with spacers and mounting screws
- Switch: 41 x 13 x 13mm
- Magnet: 45 x 13 x 13mm
- Also Available:
940WH - white
940BR - brown

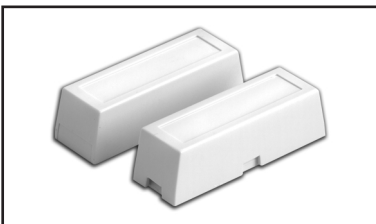


943 Super Miniature Surface Magnetic Contact

- Standard gap: 13mm (1/2")
- Flange snaps off for even smaller adhesive mount switch
- Self adhesive or screw mount
- 1.5m corded leads standard
- Switch: 25 x 13 x 6.3mm
- Magnet: 25 x 13 x 6.3mm
- Also Available:
943WH - white
943BR - brown

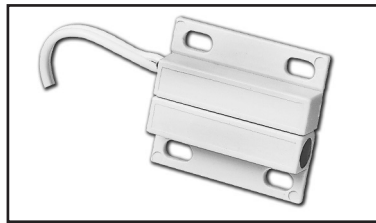


944 3/8" Diameter Press Fit Magnetic Contact

- Standard gap: 19mm (3/4")
- Completely concealed for attractive installations
- Press fit design is quick and easy
- Packaged complete with wire crimps
- Convenient 1.5m zip cord leads are standard and save valuable time
- Switch/Magnet: 9.5D x 33mm L
- Also Available:
944WH - white
944BR - brown
944GY - grey
944-2GY - SPDT contact grey

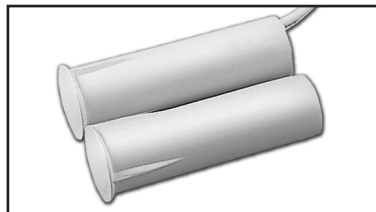


945 Adhesive Mount Magnetic Contact with Leads

- Standard gap: 32mm (1-1/4")
- Adhesive mount
- 15 foot zip cord leads standard
- External test points standard
- Switch: 38 x 10.3 x 9.5mm
- Magnet: 38 x 10.3 x 9.5mm
- Also Available:
945WH - white
945BR - brown

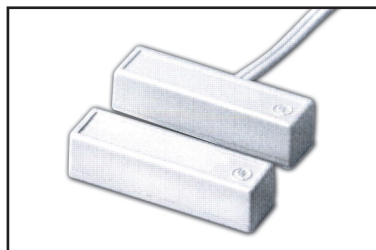

947 1" Recessed Steel Door Magnetic Contact

- Standard gap: 13mm (1/2")
- The clean look of recessed contacts that meets the requirements of steel doors
- 1" (25mm) diameter with "lock-in" mounting cap
- 1.5m zip cord leads are standard
- Switch: 25 D x 33mm L
- Magnet: 25 D x 40mm L
- Also Available:
947WH - white
947BR - brown

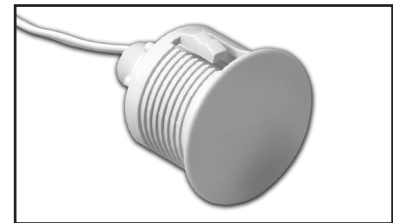

947-75 3/4" Recessed Steel Door Magnetic Contact

- Standard gap: 13mm (1/2")
- The clean look of recessed contacts that meets the requirements of steel doors
- 3/4" (19mm) diameter with "lock-in" mounting cap
- 1.5m zip cord leads are standard
- Switch: 19 D x 33mm L
- Magnet: 16 D x 40mm L
- Also Available:
947-75WH - white
947-75BR - brown



949 Surface Mount Magnetic Contact with Leads


- Standard gap: 32mm (1-1/4")
- Screw mount
- External test points standard
- Complete with spacers and mounting screws
- Switch: 55 x 10.3 x 9.5mm
- Magnet: 55 x 10.3 x 9.5mm
- Also Available:
949WH - white
949BR - brown



Magnetic Contacts


950 Magnetic Reed Contact

- Standard gap: 32mm (1-1/4")
- Ideal for garage doors or commercial use
- Ideal for concealing end of line resistor (EOL)
- Completely hides mounting screws and terminals
- Switch: 105 x 16 x 16mm
- Magnet: 105 x 16 x 16mm
- Also Available:
950BR - brown
950GY - grey

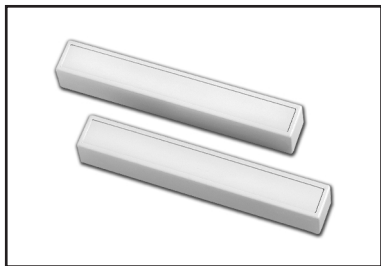


957 / 957W Overhead Door Magnetic Contact

- Standard gap: 25mm (1")
- Rugged cast aluminium housing for protecting magnet
- Armoured cable standard on every model 46cm (18")
- Unobtrusive design resists damage in high traffic areas
- Wide gap: 51mm (2") minimum
- Switch: 108 x 43 x 13mm
- Magnet: 95 x 33 x 43mm
- Also Available:
957W - wide gap 51mm (2")

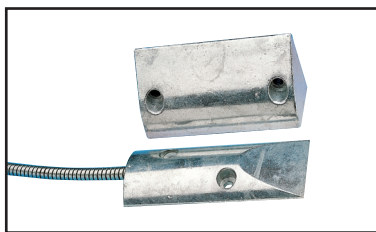


960 XTP Surface Mount Magnetic Contact

- Standard gap: 64mm (2-1/2")
- XTP contacts withstand surges up to 2400 volts DC
- The toughest commercial contact ever developed
- Rugged aluminum housing in sleek, attractive design
- Completely immersion proof
- 1m (3') armoured cable is standard
- Switch: 89 x 30 x 15mm
- Magnet: 89 x 30 x 15mm
- Also Available:
960-2 - SPDT Switch (Form C)

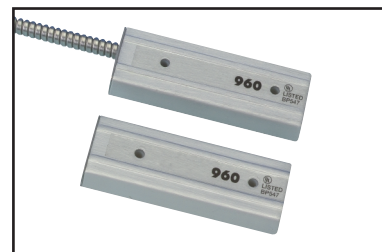


951 3/8" Diameter Miniature Press Fit Magnetic Contact

- Standard gap: 11mm (7/16")
- Magnet only 13mm long, ideal for casement windows and other thin frame applications
- Complete with wire crimps
- 1.5m zip cord leads are standard
- Switch: 9.5 D x 16mm L
- Magnet: 9.5 D x 13mm L
- Also Available:
951WH - white
951BR - brown

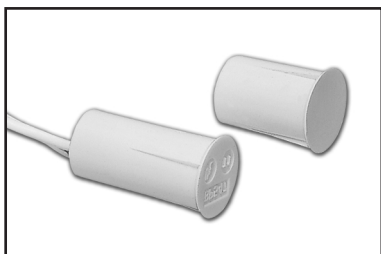


958 / 958-2 Overhead Door Magnetic Contact

- Standard gap: 51mm (2")
- Adjustable magnet with L bracket
- 60cm (24") armoured cable standard
- Epoxy sealed for protect from moisture and impact
- Rugged "Shock Absorber" design protects red against flex or damage to housing
- Switch: 108 x 43 x 13mm
- Magnet: 102 x 51 x 51mm
- Also Available:
958-2 - SPDT Switch (Form C)

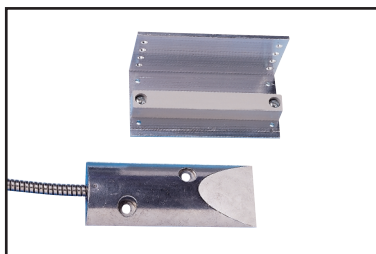

7945WH STP Magnetic Contact

- Standard gap: 64mm (2-1/2")
- XTP contacts withstand surges up to 2400 volts DC
- Like our rugged 96 series, but in plastic case design
- Epoxy sealed
- 1.8m (6') armoured cable is standard
- Completely immersion proof
- Switch: 102 x 13 x 13mm
- Magnet: 102 x 13 x 13mm
- Also Available:
79452GY - SPDT Switch (Form C)

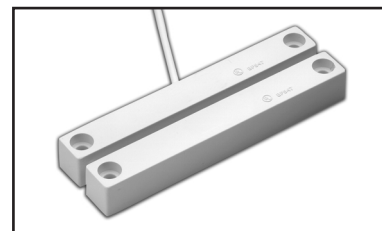

For more information:

Asia Pacific Headquarters: Tel: (86) 21-5257 4568	India Tel: (91) 124 5105671
Australia Tel: (61) 1300 368 755	Korea Tel: (82) 2-799 6130
China Tel: (86) 755-8299 5168	Singapore Tel: (65) 6333 9563
Hong Kong Tel: (852) 2405 2323	Taiwan Tel: (886) 2-2245 1000

www.security.honeywell.com
security.ap@honeywell.com

Automation & Control Solutions

Honeywell Security - Asia Pacific
Honeywell International Inc.
www.honeywell.com

ADContactsAP0505
©2005 Honeywell International Inc.

Honeywell