

A-60/120



PUBLIC ADDRESS AMPLIFIER




FEATURES

- **60W/120W HIGHLY RELIABLE PA AMPLIFIER**
These models can deliver very high output power at less than 1% THD(A-60:60W, A-120:120W).
- **VERSATILE AND EASY TO USE**
Incorporating all the necessary system components to provide versatility in an easy five channels of input to use from: five channels of input signals (MIC1-3, AUX1-2).
- **TONE CONTROL**
Tone control, bass & treble, for better sound.
- **MIC 1, PRIORITY**
Mic 1 overrides other input channels.

SPECIFICATIONS

- **ELECTRICAL** *0dB=0.775Vrms
 - Rated Output/Impedance
 -A-60:15.5V/4Ω, 70V/81.6Ω, 100V/166.7Ω
 -A-120:21.9V/4Ω, 70V/40.8Ω, 100V/83.3Ω
 - Input Sensitivity/Impedance
 - MIC 1~12.....-60dB/600Ω, BAL
 - AUX.....-10dB/10kΩ, UNBAL
 - Frequency Response(±3dB).....80Hz~16kHz
 - T.H.DLess than 1%
 - S/N
 - MICMore than 50dB
 - AUXMore than 75dB
 - Tone Control
 - HIGH(10kHz)±12dB
 - LOW(100Hz).....±12dB
- **GENERAL**
 - Power SourceAC 110V-240V, 50/60Hz
 - Power ConsumptionA-60:75W
 -A-120:105W
 - Weight.....A-60:8.9kg
 -A-120:10.3kg
 - Dimensions.....420(W) ×88(H) ×320(D)mm

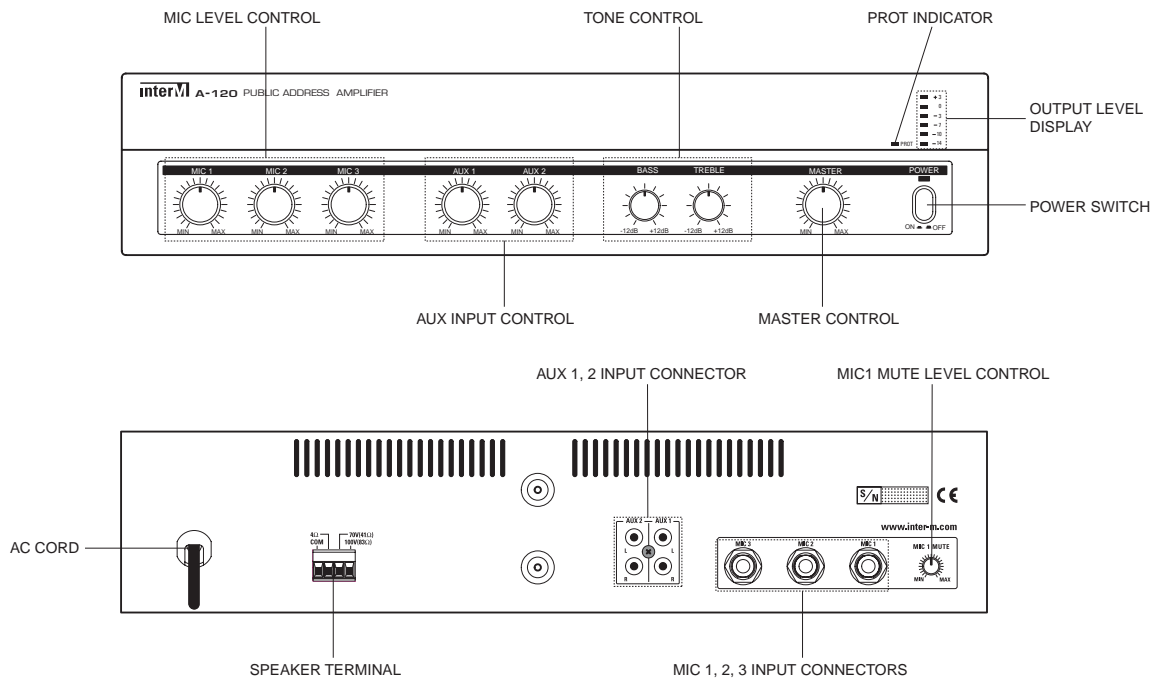

BLOCK DIAGRAM

