

CPA - 9313/9325



PUBLIC ADDRESS POWER AMPLIFIER



FEATURES

- Contractor amplifier with the line detector which indicates when there is no signal, or disconnection between amplifier and speakers.
- Volume control knob on the front panel
- Thermal, PC limiter protection
- Balance input (XLR)
- 400Hz HP Filter, ground selector - frame/float
- Input level control: 12dB, -0dB(1V)
- Fan forced cooling system
- XLR parallel connector for multiple amplifier driving


SPECIFICATIONS

■ ELECTRICAL

- Rated Output.....CPA-9313: 130W
CPA-9325: 250W
- Frequency (+1/-3dB)70Hz-18kHz
- THD rate (Rated output 1kHz)Less than 1%
- High-Pass Filter (400Hz)-3dB
- Low-Pass Filter (15kHz)-3dB
- S/N RatioAbove 95dB
- Input Sensitivity/Impedance.....1V/10k BALANCED
- Output Voltage/Impedance
-CPA-9313: 4 /22.8V, 38 /70V, 77 /100V
CPA-9325: 4 /31.6V, 20 /70V, 40 /100V

■ GENERAL

- Power Source100-120VAC or 220-240VAC; 50/60Hz, DC 24V
(Supplied AC mains transformer depends on country requirements)
- Power Consumption.....CPA-9313: 130W
CPA-9325: 280W
- Weight.....CPA-9313: 14kg/30.8lb
CPA-9325: 19kg/41.8lb
- Dimensions482(W) x 132(H) x 280(D)mm
19(W) x 5.2(H) x 11(D)in

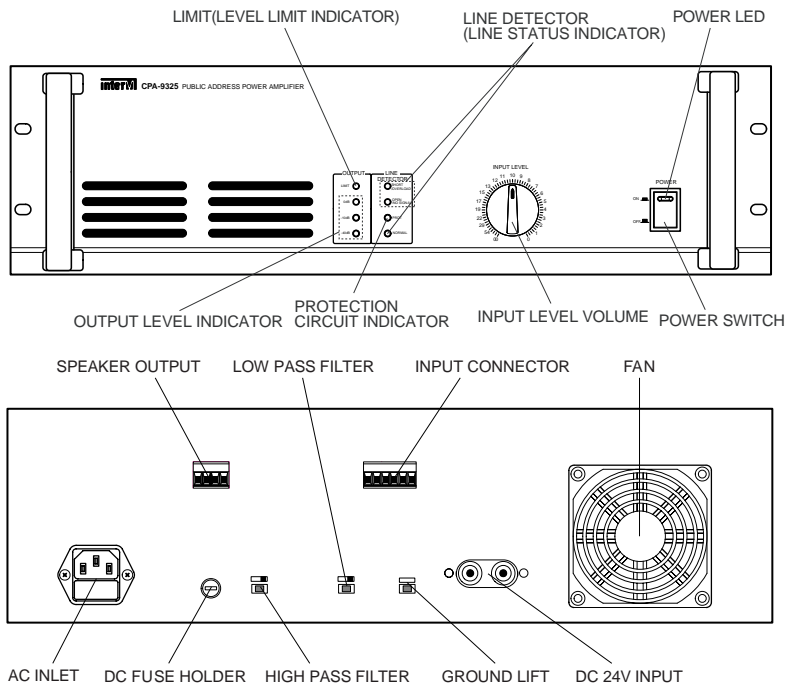

BLOCK DIAGRAM

