

CPA-9337



PUBLIC ADDRESS POWER AMPLIFIER



FEATURES

- Contractor amplifier with the line detector which indicates when there is no signal, or disconnection between amplifier and speakers.
- Volume control knob on the front panel
- Thermal, PC limiter protection
- Balance input (XLR)
- 400Hz HP Filter, ground selector - frame/float
- Input level control: 12dB, -0dB(1V)
- Fan forced cooling system
- XLR parallel connector for multiple amplifier driving


SPECIFICATIONS

■ ELECTRICAL

- Rated Output370W
- Frequency (+1/-3dB)70Hz-18kHz
- THD rate (Rated output 1kHz)Less than 1%
- High-Pass Filter (400Hz)-3dB
- Low-Pass Filter (15kHz)-3dB
- S/N RatioAbove 95dB
- Input Sensitivity/Impedance.....1V/10k BALANCED
- Output Voltage/Impedance
4 /38.5V, 13.2 /70V, 27 /100V

■ GENERAL

- Power Source100-120VAC or 220-240VAC; 50/60Hz, DC 24V
(Supplied AC mains transformer depends on country requirements)
- Power Consumption.410W
- Weight22kg/48.5lb
- Dimensions482(W) x 132(H) x 280(D)mm
19(W) x 5.2(H) x 11(D)in

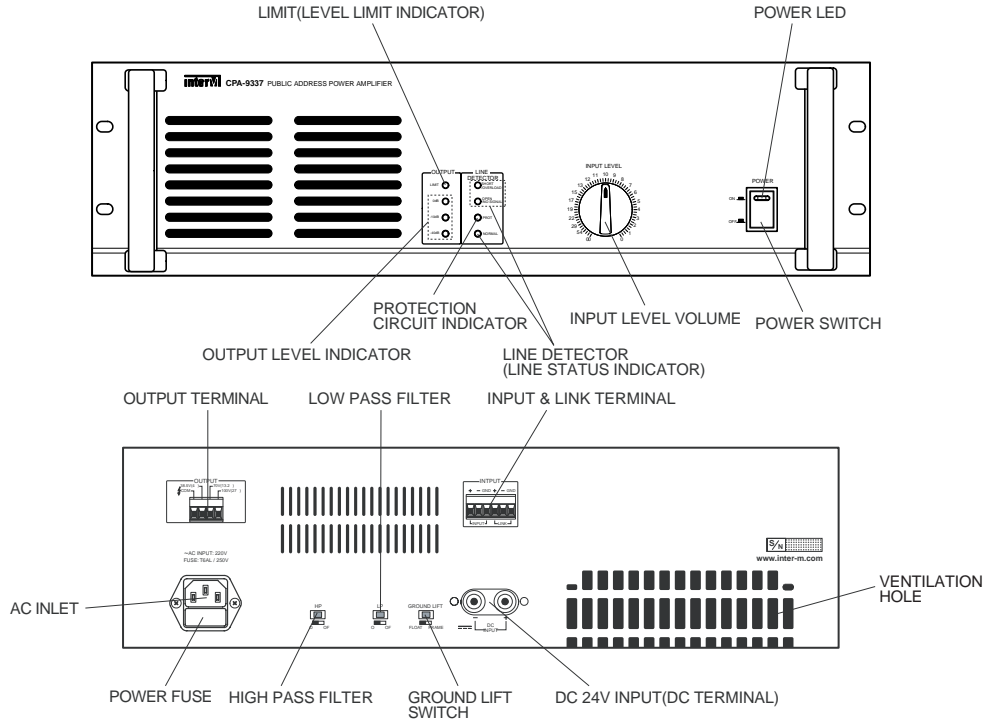

BLOCK DIAGRAM

