

PA-2100/2200



CD DECK RECEIVER




FEATURES

- 1 Mic balanced 1/4", 3 Mics balanced XLR, 2 Aux inputs
- 3 CD changer W/24 programmable presets
- Full logic recording playback auto reverse cassette deck
- Built-in 5 band equalizer
- Mic 1 and chime override other signals

SPECIFICATIONS

- AMP SECTION
 - Rated Output(RMS)PA-2100: 100W
PA-2200: 200W
 - Speaker Output/Impedance
PA-2100100W: 20V/4 , 70V/49 , 100V/100
PA-2200200W: 28.3V/4 , 70V/24.5 , 100V/50
 - Input Sensitivity/Impedance
MIC 1, 2, 3-60dB/20k
AUX 1, 2-10dB/20k
AMP IN0 dB/10k
 - Frequency
MIC 1, 2, 3100Hz-12kHz
AUX 1, 260Hz-15kHz
AMP IN150Hz-12kHz
 - THD Ratebelow 1%
 - S/N ratio
MIC 1, 2, 3Above 60dB
AUX 1, 2Above 75dB
 - Equalizer(100Hz, 300Hz, 1kHz, 3kHz, 10kHz)±12dB
- CD SECTION
 - TYPE3 CD CHANGER OF MAGAZINE TYPE
 - Frequency(+1/-3dB)20Hz-20kHz
 - T.H.DBelow 0.2%
- CASSETTE DECK SECTION
 - TYPELOGIC CASSETTE TAPE
 - Frequency(±3dB)125Hz-8kHz
 - T.H.DBelow 2%
- GENERAL
 - Power Source100-120VAC or 220-240VAC; 50/60Hz
(Supplied AC mains transformer depends on country requirements)
 - Power ConsumptionPA-2100: 120W
PA-2200: 230W
 - WeightPA-2100: 14.5kg/32lb
PA-2200: 18kg/39.6lb
 - Dimensions440(W) x 177(H) x 390(D)mm
17.3(W) x 7(H) x 15.4(D)in

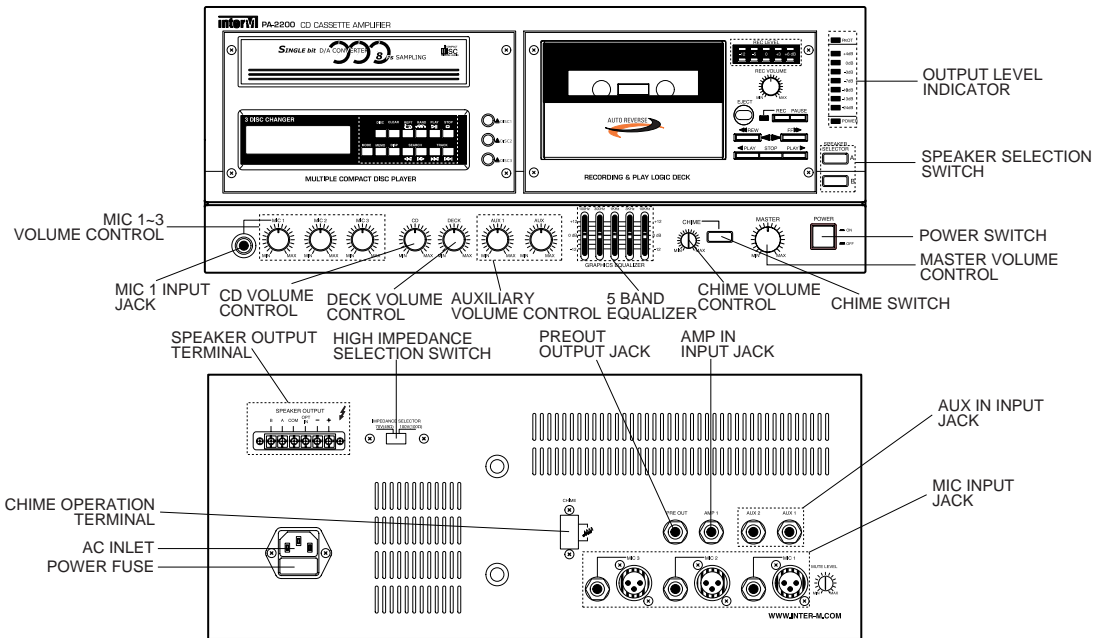

BLOCK DIAGRAM

