

AMPLIFIER




FEATURES

- **35W OUTPUT POWER**
This model can deliver very strong 35 Watts(RMS) output power at less than 5% T.H.D.
- **VERSATILE AND CONVENIENT**
3 channels of input signals from MIC 1, MIC 2(AUX 1), MIC 3(AUX 2) provided and mixed, and call of tone is incorporated for versatile and convenient use.
- **TELEPHONE INPUT**
This model has the function of telephone input to connect with telephone system.
- **MUTING FOR PRIORITY**
Signal from MIC1 can be activation muting circuit which temporarily mutes signals from other(MIC 2, MIC 3) input. (Telephone can be mutes signals from MIC 1, MIC 2, MIC 3)

SPECIFICATIONS

- **ELECTRICAL**
 - Rated Output35W(RMS)
4Ω/11.8V, 8Ω/16.7V, 18Ω/25V, 140Ω/70V
 - Input Sensitivity/ImpedanceMIC Screw/T 2mV/600Ω
AUX Screw/T 150mV/1KΩ
Telephone Screw/T 0.775V/600Ω
 - Frequency Response150Hz~15KHz
 - T.H.D.....Less than 5%
 - S/NBetter than 60dB
 - Tone Control Effect..... ±10dB
- **GENERAL**
 - Power SourceAC 110V-240V, 50/60Hz
 - Power Consumption80W
 - Weight4.4kg
 - Dimensions.....290(W) × 70(H) × 196(D)mm

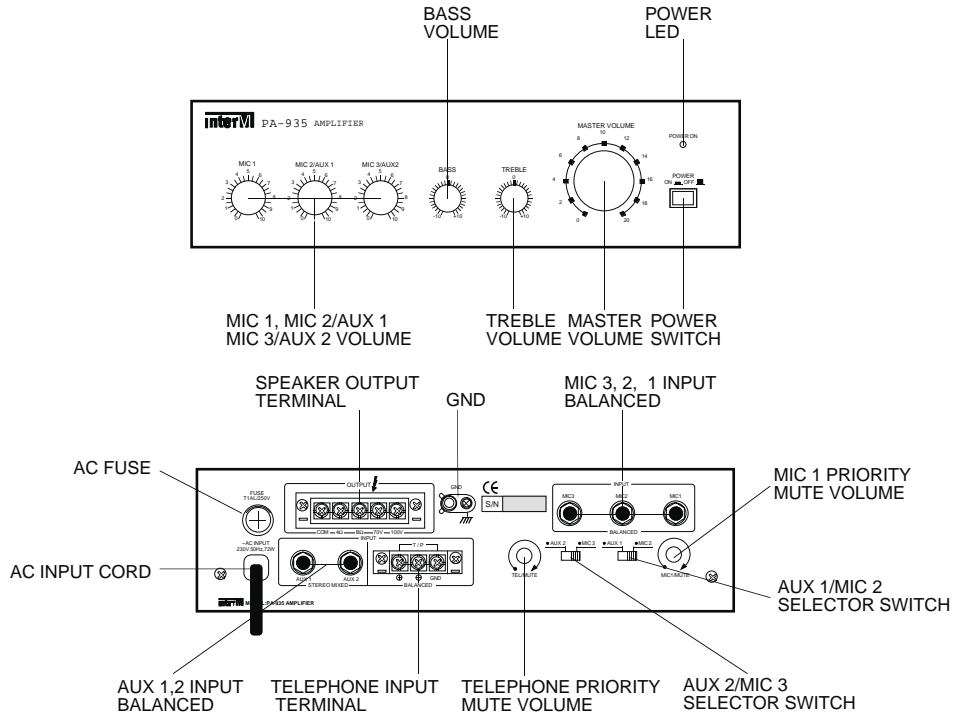

BLOCK DIAGRAM

