

SCM-5000/6000



DYNAMIC MICROPHONE



SCM-5000

SCM-6000

FEATURES


- SCM-5000 : A general purpose microphone suitable for applications requiring good vocal response and feedback rejection.
- SCM-6000 : A general purpose microphone with enhanced low frequency performance for wide bandwidth vocal applications as well as instrument miking.

SPECIFICATIONS


Spec	MODEL	SCM-5000	SCM-6000
Element type		Dynamic microphone	
Frequency range		50Hz~15kHz	50Hz~12kHz
Sensitivity		-72dB±3dB	-74dB±3dB
Impedance		600Ω±30%	300Ω±30%
Weight		285g/0.62lb(Cable not included)	324g/0.71lb(Cable not included)
Dimensions		ø53 × 183(mm)/ø2.1 × 7.2(in)	ø56 × 168(mm)/ø2.2 × 6.6(in)

POLAR PATTERN

SCM-5000

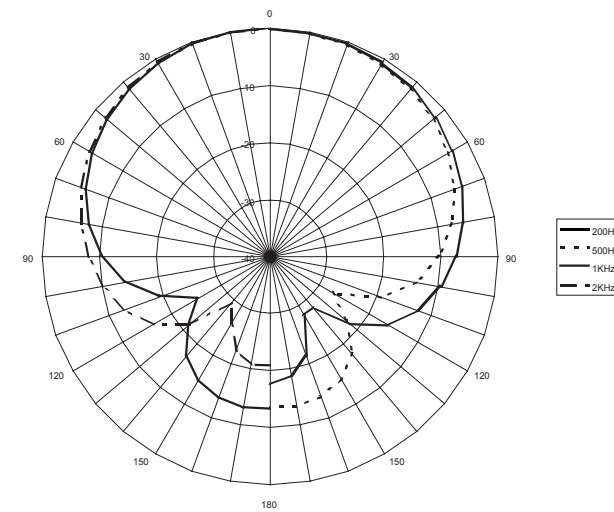


SCM-6000

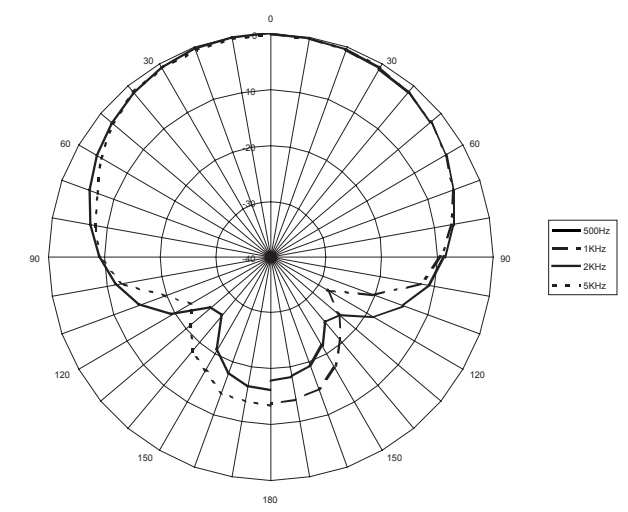


TYPICAL FREQUENCY RESPONSE

SCM-5000

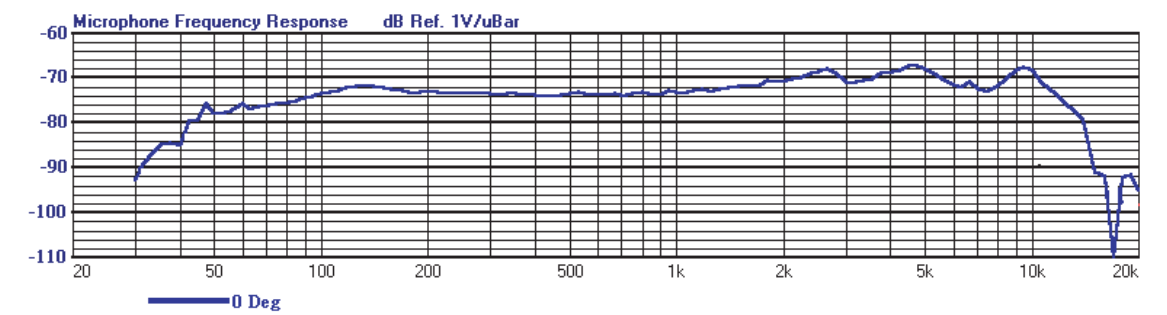

SCM-6000

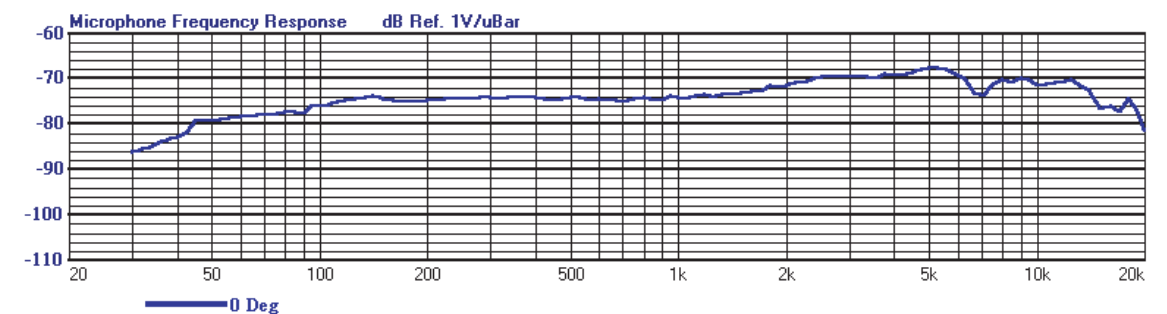

OFFICE : 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA TEL : 82-2-2289-8140~8, FAX : 82-2-2289-8149

Home page : <http://www.inter-m.com>

E-mail : export@inter-m.com