

### Features

- 16 Speaker Selectors
- All, Group 1, Group 2 Selectors
- Remote and Timer Capability (ZS—5116 only)
- Speaker LEDs
- 24VDC Operation
- Rack Mount(1RU)



### Description

The ZS-5116/5316I speaker selector allows a user to select 16 speakers manually, remotely or via timer control. The unit allows connection of 16 speakers and additional ZS-5316I units. The ZS-5316I Indirect Speaker Selector connects to the Kodio PX-5116, unlike the ZS-5116, which can be operated as a stand-alone unit. The units feature speaker and group Selection LEDs via the front panel. The unit is powered by a 24VDC power source, not supplied. The unit is packaged in a 1.75" high (1RU) rack-mount enclosure.

### Technical Specifications

ELECTRICAL	ZS-5116	ZS-5316I
Speaker Selector	16, Group 1 & 2	
Indicators	16, Group 1 & 2	
Current Rating	1A	
<b>GENERAL</b>		
Power Source	24VDC	
Weight	3.6kg	4.2kg
	7.9lbs	9.2lbs
Dimensions mm	482 x 44 x 280	
(W x H x D ) inch	19" x 1.75" x 11"	

# ZS-5116/5316I Architects and Engineers Specifications


The speaker selector shall allow a user to switch 16 speakers manually, remotely or via a timer (ZS-5116 only)

The unit shall allow connection of speakers and additional ZS-5316I units. The unit shall feature group and speaker selection LEDs VIA THE FRONT PANEL.


The speaker selector shall measure 19"(482mm) wide x 1.75" (44mm) high x 11" (280mm) deep, and shall mount in a standard 19" rack. The power source shall be 24VDC, not supplied.

The speaker selector shall be a KODIO model ZS-5116 & ZS-5316I.

## ZS-5116 Front and Rear Views

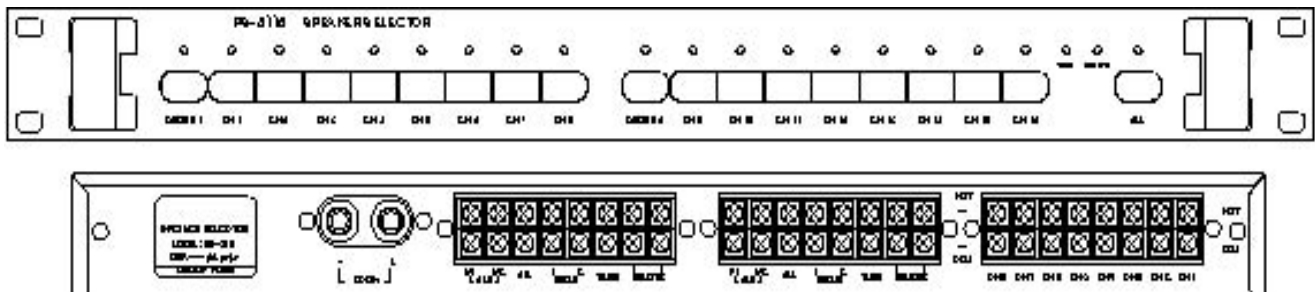

## ZS-5316I Front and Rear Views

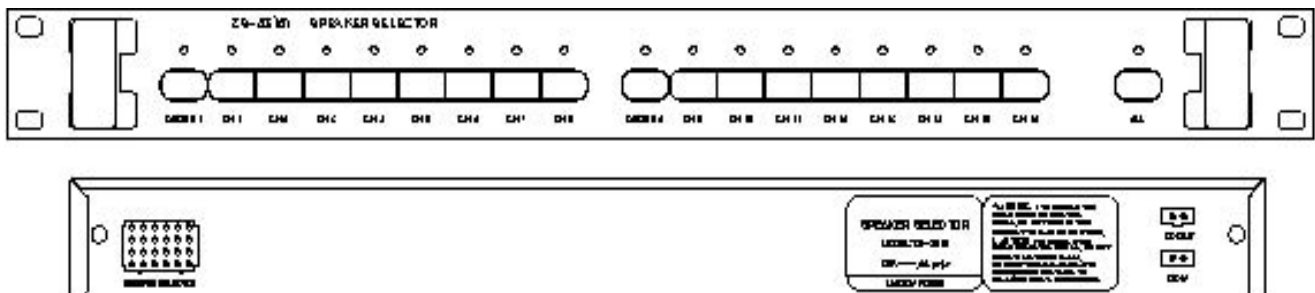

OFFICE : 1F, 318-4, Yatap-dong, Bundang-gu, Seongnam-city, Gyeonggi-do, South Korea.  
TEL: 82-31-704-3050, FAX: 82-31-704-3056, www.kodio.co.kr E-MAIL: joseph@disk.or.kr