

► Dome Camera Controller

SCC-1600

(High Performance Controller)

Main Features

- ▶ Max. configuration : 16 Cameras, 2 monitors
- ▶ Preset positions : Maximum 64 locations
- ▶ Camera Speed selection : Proportional to angle of joystick
- ▶ Pan/Tilt swing control
- ▶ Auto Sequence : Sequential Surveillance at preset intervals (With pauses from 1~99 seconds : speed change in up to 64 steps)
- ▶ Control of Group Sequence, Tour Sequence
- ▶ Freeze function, PTZ Trace function, Spiral function
- ▶ Capable of registering up to six Groups
- ▶ Auto Swing : Can be preset to swing between two points
- ▶ Auto Switcher : Shows images from 16 cameras by switching between 2 monitor
- ▶ Alarm Input : 6 channels
- ▶ Alarm Output : 1 channel
- ▶ Easy camera set-up via OSD



> SCC-1600




> SCC-16

SCC-16

(Simple, Compact and User-friendly Control of a Maximum of 253 Cameras)

Main Features

- ▶ Preset positions : Maximum 64 locations
- ▶ Camera Speed selection : Proportional to angle of joystick
- ▶ Pan/Tilt swing control
- ▶ Auto Sequence : Sequential Surveillance at preset intervals (With pauses from 1-99 seconds : speed changes of up to 64 steps)
- ▶ Control of : Group Sequence, Tour Sequence, Freeze function
- ▶ PTZ Trace function and Spiral function
- ▶ Capable of registering up to six groups
- ▶ Auto Swing : Can be preset to swing between two points
- ▶ Easy camera set-up via OSD

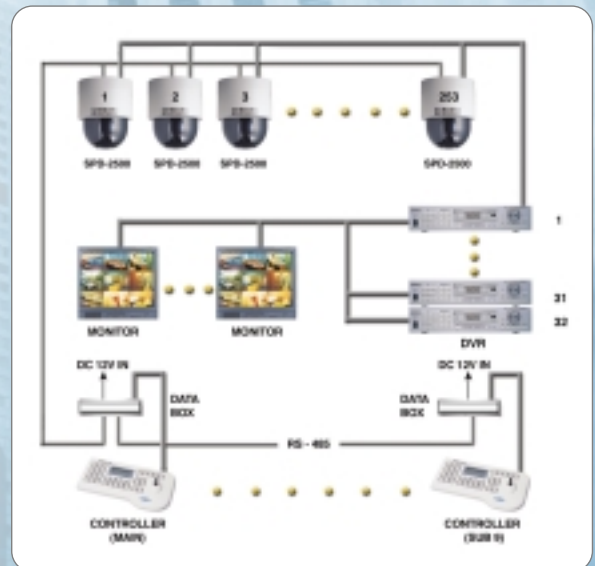

Specification

Model	SCC-1600	SCC-16
Power Supply	DC12V, 500mA	DC 9V, 500mA
Video Input/Output	Input : CVBS 1.0Vp-p, 75, BNC:16 Output : CVBS 1.0Vp-p, 75, BNC:2	
Camera Control Interface	RS-485, Serial Interface	RS-485, RS-422
Alarm Interface Input/Output	16 NO, NC Switchable 1 relay (NO, NC, COM, GND)	
Joy Stick	Pan/Tilt, Zoom, One Push Auto Focus	Pan/Tilt
Manual Operation	Camera Selection : 1~16 Monitor Selection : 1~2 Zoom Switch : Wide & Tele Focus Switch : Near & Far	Camera Selection : 1~253 Monitor Selection : 1 Zoom Switch : Wide & Tele Focus Switch : Near & Far
Auto Surveillance Functions Sequence	Swing : Surveillance between 2 positions Surveillance of preset positions in turn Tour : Surveillance of groups in turn Switcher : Video switcher	Swing : Surveillance between 2 positions Surveillance of preset positions in turn Tour : Surveillance of groups in turn
OSD	Available	
Dimension(WxHxD)	400x170x51	337.5x180x31.6
Weight	Approx. 2.1Kg	Approx. 1.2Kg