


VD-N551DN_IR (PAL)




540 TVL True Day/Night Vandal Proof Dome Camera With True D/N



3-Axis

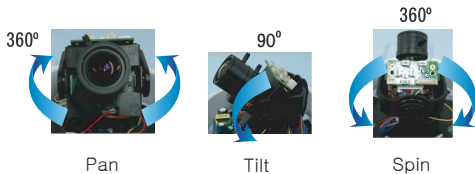

Dimensions (UNIT : mm)

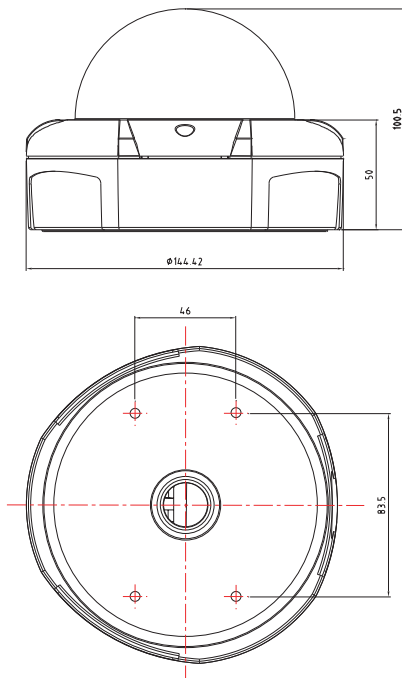

Features

- 1/3" SONY Super HAD CCD Sensor
- True Day/Night (IRC)
- 540 TV Lines
- Disk Saving with DNR Technology (Digital Noise Reduction)
- Varifocal Lens 4~9mm
- 2nd Video-out Available
- Multi OSD function built-in
- DC 12V
- White Pearl Housing

Specification

ITEM	VD-N551DN_IR
Signal System	PAL
Image Sensor	1/3" SONY Super HAD CCD
Effective Pixel	752H x 582V
Resolution	540 TV Lines
Shutter Speed	Auto/ Manual (x128 . 1/50 ~1/100,000 sec) sens up SENS UP Limite is selectable / Flickerless
Video Output	VBS 1.0Vp-p(75Ω Load)
Sync. System	Internal
Scanning System	2:1 Interlaced
S/N Ratio	Over 48dB
Min. Illumination	0.008Lux
Day/Night Function	IR On_ True Day/Night (IRC) Mechanism IR Off_Auto/On
Motion Detection	On/ Off (4 zone)
Mirror	On/ Off
Sharpness	On/ Off (Level adjustable)
Privacy	On/ Off (4 zone)
Lens	DC Iris Varifocal 4.0 ~ 9.0mm
Gamma	0.45
White Balance	ATW/ AWC/ Manual
Power Consumption	No IR_150mA. 18IR Led_700mA.
OSD	Built-In
BLC	Low/ Middle/ High/ Off Selectable
AGC	Low/ Middle/ High/ Off Selectable
DNR	Low/ Middle/ High/ Off Selectable
Power Supply	DC 12V. (Dual Voltage: Optional)
Operating Temp.	-10℃ ~ +50℃
Dimension	145mm(W) x 101mm(H)

* 2nd Video-Out Available

* Specification are subject to change without any prior notice.