


QSD-A360-WDR (NTSC) / QSD-A361-WDR (PAL)



36x Speed dome camera (Outdoor)



Dimensions (UNIT : mm)

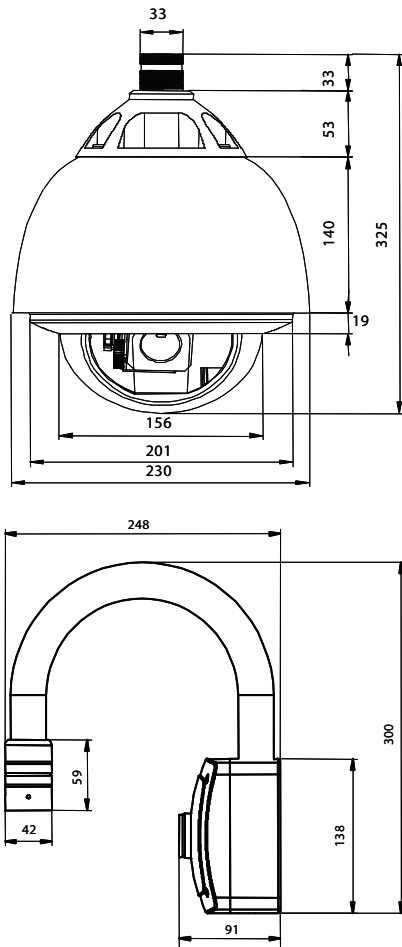

Features

- Optical 36x, Digital 10x
- WDR (Wide Dynamic Range)
- True Day & Night (ICR)
- 128 Preset Positions
- 8 Privacy zone
- 4 Pattern, 8 Group
- Alarm In/Out (8/4)
- Pelco D & P protocol
- Motion detection
- IP66, Weather proof

Specification

ITEM	QSD-A360-WDR	QSD-A361-WDR
Signal System	NTSC	PAL
Image Sensor	1/4" SONY CCD	
Max Pixels	410K (811H x 508V)	470K (795H x 596V)
Effective Pixels	380K (768H x 494V)	440K (752H x 582V)
Zoom	36x Optical zoom, 12x Digital zoom	
Focal length	F1.6~4.5, f=3.4~122.4mm	
S/N Ratio	More than 50dB (AGC Off)	
Horizontal Res.	530 TV Lines	
Min. Illumination	0.3 Lux(Day). 0.005 Lux (@50 IRE, F=1.6)	
White Balance	Auto / Manual (Red, Blue gain adjustable)	
Day/Night	Auto / Day / Night (ICR)	
Focus	Auto / Manual / Semi-Auto	
Iris	Auto / Manual	
Backlight	On / Off	
Pan/Tilt Range	360° / 90°	
Pan Speed	0.1 ~ 240 /sec (64 Levels)	
Preset point	128 Presets	
Preset Speed	Max 400° /sec	
Privacy Zone	8 zones	
Operating Temp.	-30°C ~ 50°C	
Communication	RS-485	
Alarm in/out	8 inputs / 4 output (optional)	
OSD	Built in	
Operation Humidity	Less than 90% RH	
Dimension	Dome: 152mm, Housing: 214x260(H)mm	
Weight	Approx 2.5 Kg	
Power consumption	AC 24V / 2.5A	

Optional model

- QSD-360-WDR / QSD-361-WDR : Indoor

Specification are subject to change without any prior notice.